


# BARIX

## Annunicom PS Touch

Desktop IP Intercom and paging master station with touch screen, PoE powered.

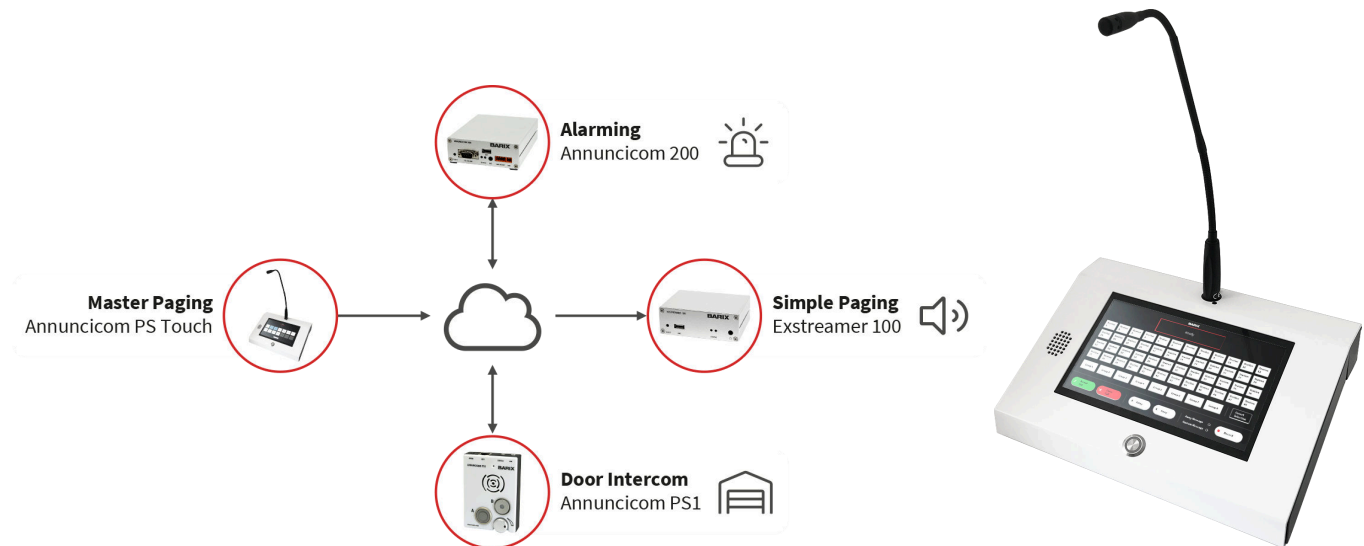

The Barix Paging Station Annunicom PS Touch is a universal, TCP/IP connected intercom station for use in IP Intercom, Paging and VoIP applications. The PS Touch directly connects to the network via a 10/100Mbps connection, and is powered over the network interface (PoE, 802.3af standard).

PS Touch can be used as a master station for IP based intercom and paging systems, which can be built without any central servers or PCs.

The PS Touch is equipped with a touch screen display, an XLR connected professional gooseneck microphone and a built-in speaker. Optional flash memory for stored messages and announcements is available.

Annunicom PS Touch is delivered with Barix Simple Paging Master firmware or IC Paging Master firmware. Additional firmware support on request.

---

### Applications

- Factory floors, corporate buildings
- Firefighter teams, hospitals, airports
- Schools, campuses, train stations

### Features

- High audio quality
- High contrast capacitive 10.1" touch screen
- Robust metal case
- Haptic mechanical talk button
- Works with Barix Simple Paging or IC Paging solution
- PoE powered

# Technical Specifications

## Power Supply Input

- Powered over the network interface (PoE, 802.3af standard)

## 1 Ethernet Interfaces

- RJ45 10/100 auto detect, IPv4

## Audio Input

- XLR microphone connector with 13 Volt bias voltage

## Audio output

- 5-Watt output speaker

## Touch Screen

- 10.1" size
- Touch type: capacitive
- 1024x600 pixel resolution
- backlight LED >30,000 hours
- >1 million touches

## Barix solution support

- Simple Paging (request at order)
- IC Paging (request at order)
- SIP and others on request

## HW/SW environment

- Barix IPAM302
- Simple Paging or IC Paging firmware preinstalled

## User Interface

- Web interface for control, status and configuration

## Case

- Metal
- 350x250x150mm (13.8x9.8x5.9 inch) measured w/o microphone
- ~ 2500g

## MTBF

- 30'000 hours

## Warranty

- Two years

---

## Environmental

### Operating Environment

0 to +50°C / 32 to 122°F

0 - 70% relative humidity, non-condensing

### Storage Conditions

-20 to +70°C / -4 to 158°F

0 - 70% relative humidity, non-condensing

## Certifications

CE, RoHS, others in examination

## Ordering Information

2020.9305P Annunicom PS Touch Simple Paging

2022.9361P Annunicom PS Touch 400 Package (IC Paging)

2021.9353P Annunicom PS Touch 400 OEM



For commercial related questions (distributors contacts, price list, business opportunities) please contact: [sales@barix.com](mailto:sales@barix.com)



For technical inquiries (problem reports, request for documentation, etc.) please contact: [support@barix.com](mailto:support@barix.com)

---

## Barix AG

Limmatstrasse 21, 8005 Zürich, Switzerland

Phone: +41 434 33 22 11

[www.barix.com](http://www.barix.com)



Direct Link