


V

High Efficiency Broadband Doherty

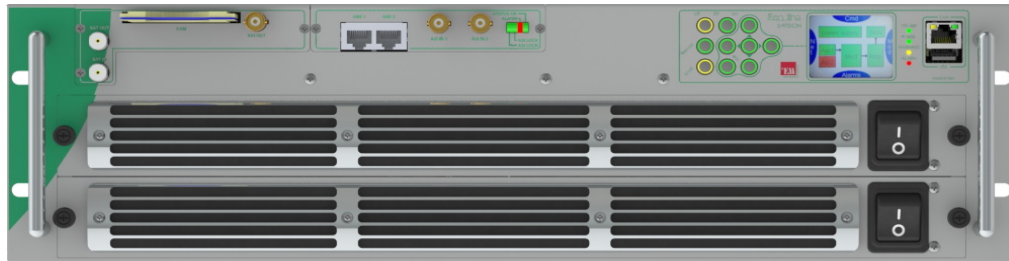

The TV transmitter technology
 is compact and suitable for
 use in various environments
 DVBT, ISDB-T, ATSC, DVB-T2, DTG, DAB, DMB, ATSC, PAL, NTSC modulations fully supported
 Dual mode

The antenna is a
 in an Italian design

The compact medium
 transmitter are generated by transmitter
 transceiver

all in a single

interfaced via

Various selection

remote using

the

available

means serial port or

Transceiver internal

using

remote

automatic remote control



MAIN FEATURES

- Compact U 19" Rack chassis
- Output Power up to 100 W rms in digital or up to 100 W p.s. in analogue
- High efficiency wideband or broadband amplifier technology
- DVB-T/H/T2, ISDB-T/Tb, DTG, DAB/DAB+/T-DMB, ATSC, PAL, NTSC modulations fully supported
- Embedded Re-Multiplexer/Layer Combiner/TS to BTS (188 to 204 byte) converter for ISDB-Tb
- Adaptive pre-correction circuits
- Powerful echo canceller when OneCompact is used as an on-channel repeater
- On-board high stability GPS / GLONASS receiver with battery
- Flexible input interfaces:
 - 4 x ASI inputs (TS, BTS, T2MI, SMPTE-310M) + Analog input
 - 2 x ASI inputs and 2 x Gigabit Ethernet
 - 1 x DVB-S/S2 Satellite Receiver input
 - 1 x RF input
- SNMP, Web Interface (



SPECIFICATIONS

TRANSMITTERS

UHF digital output power:	up to 600 W rms @ MER 38 dB typ. (DVB, ISDB)
UHF analogue output power:	up to 1200 W p.s.
VHF Digital output power:	up to 1200 W rms @ MER 37 dB typ. (DVB, IS-DB) up to 650 W rms (ATSC)
VHF analogue output power:	up to 1200 W p.s.
Frequency agility:	UHF Band IV and V or VHF Band III
Frequency resolution:	1 Hz
Pre-correction:	Adaptive
RF connector:	7/16 (f), 50 Ohm

MODULATOR

DVB-T/-H/-T2

Standard:	EN300744, EN302304, EN302755, TS101191, TS102773 (T2-MI), TS102034 4x ASI BNC (f), 75 Ohm or 2x ASI BNC (f), 75 Ohm and 2x RJ45 TS oIP 10/100/1000 Switch seamless between ASI inputs.
Inputs:	Hierarchical and not hierarchical (DVB-T)
FFT:	1K (DVB-T2), 2K, 4K, 8K, 8K ext. (DVB-T2), 16K & 16K ext. (DVB-T2), 32K & 32K ext. (DVB-T2)
Code rate:	All modalities available according to the standard Block Short or Normal (DVB-T2) DVB-T: Reed-Solomon (204, 188) DVB-T2: BCH, LDPC
Guard interval:	1/32, 1/16, 1/8, 1/4, 19/256 (DVB-T2), 19/128 (DVB-T2), 1/128 (DVB-T2)
Constellation:	QPSK, 16QAM, 64QAM, 256QAM (DVB-T2). Rotated and non rotated (DVB-T2)
MISO processing:	Supported

ISDB-Tb

Standard:	ABNT NBR 15601, ABNT NBR 15603
Inputs:	4x ASI TS/BTS BNC (f), 75 Ohm or 2x ASI TS/BTS BNC (f), 75 Ohm and 2x RJ45 TS/BTS oIP 10/100/1000
FFT:	Mode 1 (2K), Mode 2 (4K), Mode 3 (8K)
Code rate:	1/2, 2/3, 3/4, 5/6, 7/8
Guard interval:	1/4, 1/8, 1/16, 1/32
Hierarchical modulation:	Up to 3 layers
Constellation:	QPSK, 16QAM, 64QAM
Time interleaver:	Fully supported
Partial reception:	Supported

DAB/DAB+/T-DMB

Standard:	EN 300401, ETS 300 799
Inputs:	4x ETI (NI[G703], NA5376[G704] or NA5592[G704]) BNC (f), 75 Ohm
Transmission modes:	Mode I, II, III, IV (Automatically detected from the ETI stream, or user selectable)
Operation:	MFN or SFN operations

ATSC

Standard:	A/53, A/110
Inputs:	4x ASI / SMPTE-310M BNC (f), 75 Ohm or 2x ASI / SMPTE-310M BNC (f), 75 Ohm and 2x RJ45 TS oIP 10/100/1000
Modulation:	8-VSB
Input bit rate:	19.39 Mbit/s
Bandwidth:	6 MHz
Max processing delay:	Up to 1 second (programmable)

Analogue

Standard:	B, G, D, K, M, N, I
Inputs:	Video BNC (f), 75 Ohm, audio Tini-QG "Mini XLR", 6 Pin (m), 600 Ohm
Color system:	PAL, NTSC

SATELLITE RECEIVER (Option)

Standard:	ETSI EN 300 421 (QPSK) (DVB-S) ETSI EN 302 307 (QPSK, 8PSK, 16APSK) (DVB-S2) ETSI EN 50083-9 (ASI) ETSI EN 50221 (Common Interface)
DVB-S2:	VCN, CCM, Multi Stream and Single Stream, Normal & Short FEC frames

Symbol rate:	1 - 45 Msym/s (DVB-S) 2 - 45 Msym/s (DVB-S2)
Constellation:	QPSK, 8PSK, 16APSK
FEC:	Automatic, all modalities available according to the standard Block Short or Normal DVB-S: Reed-Solomon (204, 188) DVB-S2: BCH, LDPC
Roll-Off:	0.2, 0.25, 0.35
Input connector:	F (f), 75 Ohm
Frequency:	L-band 930÷2250 MHz
LNB control voltage:	Off, +13/18 Vdc, 22 kHz, 0.25 A (overload protection)
RF input level:	40 ÷ 100 db/μV (with attenuator)
Output connector:	BNC (f), 75 Ohm
Modality:	188 bytes
Max input bit rate:	80 Mbps (CAM limit: 72 Mbps)
CAM interface:	PCMCIA DVB-CI Common Interface
CAM mode (Conditional Access):	Multicrypt, Simulcrypt
CAS support:	Mediaguard, Viaccess, Irdeto, Conax, BISS with Professional multiprogram CAM (descrambling of up to 24 Elementary Streams) Betacrypt, Cryptoworks, Nagravision with standard consumer CAM (descrambling of up to 4 services)

GPS / GLONASS (Option)

Input connector:	N (f), 50 Ohm
Input/Monitor output 10 MHz:	BNC (f), 75 Ohm
Input/Monitor output 1 PPS:	BNC (f), 75 Ohm
Phase noise:	-140 dBc/Hz @ 10 kHz -150 dBc/Hz @ 100 kHz
Stability:	1e-12 / 24 H with disciplined OCXO
Hold-over stability:	5 μs after 5 hours (optional 1 μs after 24 hours)

MECHANICAL

Chassis:	3U rack 19"
Width:	482 mm
Height:	130.8 mm
Depth:	460.5 mm without fans
Weight:	21 Kg

CONTROLS

Web GUI
SNMP
GPIO

ENVIRONMENTAL

Operating temperature range:	-5°C ÷ 40°C
Max. relative humidity:	90% non condensing
Max. operating altitude:	2500 m. a.s.l. (>2500 m. optional)

ELECTRICAL

Power supply:	Single Phase 100÷240 V~ 50/60 Hz, IEC320 C20 Plug
Efficiency:	Up to 40% efficiency in digital (UHF models)

NOTES

To comply with the applicable standards and limit values for the suppression of out-of-band emissions (and in the case of digital standards, also for maintaining the required shoulder distance), the transmitter may only be operated with suitable filters at the RF output.

Specifications are subject to change without notice.

