



# Alice-MonoPAK-MKII

# Alice-MonoPAK-MKII



The Alice MonoPAK MKII produces a fully buffered balanced-line dual mono output from a balanced-line stereo input. Both mono outputs are electronically buffered and are independently adjustable via multi-turn pre-sets accessible through the front panel providing 10dB loss to 20dB gain with reference to 0dB input on both left and right inputs. Bridging-balanced audio inputs and mono-balanced outputs are via Neutrik XLR connectors and can be wired unbalanced if required.

Mains input is via a UK IEC connector with supplied lead (2m).  
Rack mountable kit is supplied as standard.

## Technical Specification

**Input impedance:** >20k ohms balanced (can be terminated at 600 ohms via internal link)

**Frequency response:** 20Hz to 20kHz +0dB – 0.1dB

**Common-mode rejection:** >60dB

**Noise at unity gain:** -100dB ref. +8dBu

**Distortion:** <0.005% 1kHz +8dBu output

**Max. input level:** +25dBu

**Max. output level:** +25dBu


**Output impedance:** <1 ohm balanced and floating  
0dBu = 0.775 volts RMS

**Mains supply:** 230 V AC (115V available to order)

**Power consumption:** 3VA

**Dimensions:** 275 (W) x 115 (D) x 42 (H)

**Shipping Weight:** 1.25Kg

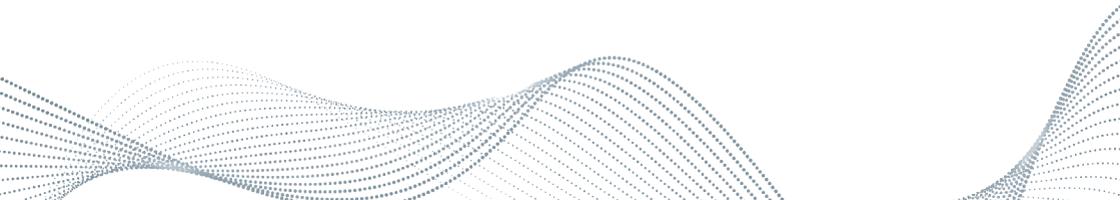

The logo for Alice Broadcast Solutions. The word "Alice" is written in a large, red, cursive script font. Below it, the words "BROADCAST SOLUTIONS" are written in a white, bold, sans-serif font, with a registered trademark symbol (®) to the right. The text is set against a dark blue background with a grid of small white dots and wavy lines of light blue and red at the top and bottom.

**Alice**<sup>®</sup>  
**BROADCAST SOLUTIONS**<sup>™</sup>

**[www.alice.co.uk](http://www.alice.co.uk)**

**Email: [info@alice.co.uk](mailto:info@alice.co.uk)**

**Phone: 01442 863494**

**SALES AND DISTRIBUTION ENQUIRIES to  
[www.alice.co.uk/sales](http://www.alice.co.uk/sales)**